

From **Model O-2000** and Model **P-8000**  
the tanks are equipped with spray-head cleaning  
(with demountable spray pipe)

Model O	Maximum capacity in Liters	Height (A)*	Height (A1)**	Length (B)	Width (C)
<b>OC 400</b>	1725	1250	1525	2115	1530
<b>O 450</b>	1900	1250	1525	2265	1530
<b>O 500</b>	2125	1250	1525	2470	1530
<b>O 600</b>	2530	1250	1535	2825	1530
<b>O 700</b>	2960	1490	1785	2440	1790
<b>O 800</b>	3300	1490	1795	2650	1785
<b>O 900</b>	3700	1490	1800	2900	1785
<b>O 1000</b>	4105	1490	1805	3150	1785
<b>O 1125</b>	4580	1490	1810	3450	1785
<b>O 1250</b>	5085	1685	1900	3030	2015
<b>O 1500</b>	6150	1685	1910	3535	2015
<b>O 1750</b>	7130	1685	1920	4015	2015
<b>O 2000</b>	8180	1725	1930	4530	2015
<b>OC 2000</b>	8100	1920	2150	3535	2270
<b>O 2250</b>	9120	1920	2160	3915	2270
<b>O 2500</b>	10020	1940	2170	4250	2270
<b>O 2750</b>	11050	1940	2180	4630	2270
<b>O 3000</b>	12000	1940	2210	4980	2270
<b>O 3500</b>	13800	2035	2280	4980	2450
<b>O 4000</b>	15670	2085	2320	5590	2450
<b>O 4500</b>	18750	2405	2605	5010	2800
<b>O 5000</b>	20560	2405	2605	5440	2800
<b>O 6000</b>	24020	2475	2655	5705	3010
<b>O 7000</b>	28200	2665	2850	5705	3210
<b>O 8000</b>	32700	2885	3015	5705	3410

Model P	Maximum capacity in Liters	Height (A)*	Height (A1)**	Length (B)	Width (C)
<b>P 1200</b>	1300	1380	1610	1965	1170
<b>P 1400</b>	1500	1380	1610	2185	1170
<b>P 1700</b>	1800	1380	1610	2530	1170
<b>P 2100</b>	2250	1550	1780	2415	1330
<b>P 2600</b>	2750	1550	1780	2840	1330
<b>P 3200</b>	3400	1680	1910	2935	1440
<b>P 4100</b>	4350	1680	1910	3620	1440
<b>PC 5000</b>	5070	1960	2115	3030	1740
<b>P 6000</b>	6125	1960	2125	3535	1740
<b>P 7000</b>	7120	1960	2145	4015	1740
<b>P 8000</b>	8075	2210	2385	3535	1980
<b>P 9000</b>	9100	2130	2390	3915	1980
<b>P 10000</b>	10000	2160	2400	4250	1980
<b>P 12000</b>	12000	2160	2425	4980	1980
<b>P 15000</b>	15460	2445	2695	4980	2240
<b>P 18000</b>	18000	2500	2745	5705	2240
<b>P 20000</b>	21800	2780	3045	5010	2625
<b>P 24000</b>	25200	2880	3090	5705	2625

Height of the spraypipe is 60 mm upto P-7000  
**(A)\*** - incl. cleaning pipe, Front tank  
**(A1)\*\*** - incl. agitator, Slope: 1:40

Height of the spraypipe is nil upto O-1750  
**(A)\*** - incl. cleaning pipe, Front tank  
**(A1)\*\*** - incl. agitator, Slope: 1:40

**MUELLER®**


# Milk cooling tanks model O and P MTCIII Cleaning system



**Mueller Sales**

Narcisstraat 14  
P.O.Box 138  
9400 AC Assen  
The Netherlands  
T: +31 (0)592 361 600  
F: +31 (0)592 361 601  
E: info@muellerbv.com

Your Mueller dealer:

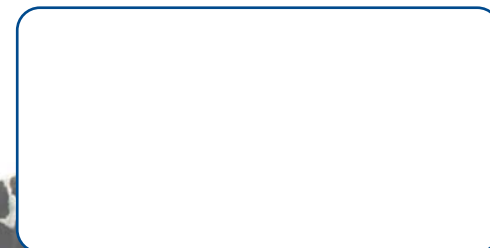

[www.muellerbv.com](http://www.muellerbv.com)

**Mueller Sales**

It is possible that some of the information in this folder may deviate from the actual execution. Consequently, no rights may be reserved with respect to the information contained in this folder. Mueller has a policy of continuous product development and reserves the right to change or modify any product and specification without prior notice.

**Model O (oval model)**



**Model P (round model)**



## Mueller milk cooling tanks - MTCIII cleaning system

The Mueller milk cooling tanks Model O and P are complete tanks with standard features such as high quality, perfect workmanship, excellent cooling qualities and an agreeable price. The Mueller milk cooling tank combines rapid cooling with low energy consumption. The shape of the tanks enables the temp-plate cooling plates, installed in the bottom part of the inner tank, to occupy as large an area as possible. This results in very efficient cooling of the milk poured into the tank.



MTCIII control unit



Milkoutlet

### The Mueller milk cooling system includes the following features:

- Circulation cleaningsystem (CRS)
- Digital temperature indication.
- 3.25"(DN80) stainless steel milk outlet with 2.5" butterfly valve and plug.
- Built-on stainless steel cleaning and control system.
- Cleaning water level control.
- Automatic detergent dosing system with automated switch to acid.
- Fixed ladder from Model O-700 and P-2100.
- Seamless outer casing.
- Heavy-duty adjustable legs, with beam profile, ensuring uniform distribution of weight and floor load.

### Features and benefits:

- Compact design.
- Rapid and efficient cooling.
- Low energy operating costs.
- High-quality materials and quality craftsmanship.
- Digital temperature indication.
- Available in a wide range of capacities.

### Optional:

- Refrigeration controls located on either the left or right-hand rear side of the vessel to minimize the overall length of the milk cooling tank.



MTCIII cleaning system

**MUELLER**

